湖北东润泽专用车辆设备有限公司

Hubei Dong Runze Special Vehicle Equipment Co., Ltd.

Specialize Custom Commercial Vehicle Body Building - Semi trailer, Full Trailer - Spare Parts

Tell:008615271357635 Email:sales@tictrucks.com Web:www.truckinchina.com Wuhan City Hubei Provin

Ambulance Van









Performance JX6477-M

Fuel gasoline
Environmental standard National IV / Euro 4



Maximum speed 140 km/h 87 mph
ABS optional
Capacity
Passenger capacity (including driver) 5-9
Weights and Ground pressure
Curb weight 1930 kg 1.9 t 4,255 lbs
Gross vehicle weight rating 2880 kg 2.9 t 6,349 lbs
Axle load distribution 1520 kg / 1360 kg
1.5 t / 1.4 t
3,351 lbs / 2,998 lbs
Dimensions
Overall length 4666 mm 15′4″
Overall width 1974 mm 6′6″
Overall height 2390 mm 7′11″
Undercarriage and Suspension
Number of axles 2
Wheelbase 2835 mm 9′4″
Front track 1692 mm 5′7″
Rear track 1700 mm 5′7″
Front overhang 945 mm 3′2″
Rear overhang 886 mm 2′11″

湖北东润泽专用车辆设备有限公司
Hubei Dong Runze Special Vehicle Equipment Co., Ltd.
Specialize Custom Commercial Vehicle Body Building - Semi trailer, Full Trailer - Spare Parts
Tell:008615271357635 Email:sales@tictrucks.com Web:www.truckinchina.com Wuhan City Hubei Provin

Angle of approach 19°
Angle of departure 18°
Leaf springs - / 3
Tyres and Wheels
Number of tyres 4
Tyres dimension 215/70R15C(8PR)
Miscellaneous
Steering control steering wheel
Engine model 4G64S4N 2351 cc 2.4 L 92 kW
126 hp Engine manufacturer Shenyang
Aerospace Mitsubishi Motors
Engine Manufacturing Co., Ltd.



Ambulance transportation-basic configuration Listing:
1 one portable folding stretcher;
2, one medicine cabinet;
3, one fixed 10L oxygen cylinder ;
4 , infusion hook 2pcs ;
5, one disinfection lamps ;
6, one dirt tub buckets ;
7, 2 single seat;
8, left Strip Chair, soft-seat cushions, backrest and seat belt ;
9' partition with sliding window 1 set;
10, one top blue light alarm equipment 100w;
11, 12V lights 2pcs;
12,one inverter 500w ;
13, one group 220V power outlet socket
14, back-door pedals;medical wear-resistant plast ic floor leather;
15, ambulance cross logo;
16, air conditioning and heater

.....



Ambulance guardianship configuration listing:
1, ambulance lamp and around burst flash lamp;
2 , one automatically car stretcher;
3, one folding stretcher;
4,oxygen system :one oxygen cylinders and oxygen cylinders cabinet, with fast interface;
5, one medical cabinet at left ;
6, one work seat, one accompanying seat;
7, one disinfection lamp ;
8, infusion hook 2 pcs ;
9, one 1000W inverse device and battery;
10, add-ins power system;
11, one electronic ventilation fan;
12, two12V lighting lamp ;
13, 220V power socket 2 pcs ;
14, one power control panel ;
15, clapboard (with observation window);
16, back-door pedal;
17 , medical wear-resistant plastic floor leather;
18, one Dirt tub;
19,ambulance identifies;
20, air conditioning and heater

.....

Ambulance selected loaded configuration listing (not contains basic transportation ambulance）
Top around installation burst flash lamp:$140
, top column flash
$180 ; paint spray system decorative strips
$480 ; automatic bus stretcher $615 ;
glass pastes $240 ;visual parking sensors and navigation s ystems $740 ; windows blind $150 ; electric aspirator $280 .

湖北东润泽专用车辆设备有限公司
Hubei Dong Runze Special Vehicle Equipment Co., Ltd.
Specialize Custom Commercial Vehicle Body Building - Semi trailer, Full Trailer - Spare Parts
Tell:008615271357635 Email:sales@tictrucks.com Web:www.truckinchina.com Wuhan City Hubei Provin

Ambulance Van JX6547D-M Diesel

Engine model **JX493ZLQ4** 2.771 L 80 kW 109 hp
Engine manufacturer JMC

General Description			
Overall Dimension(mm)	5418×1974×2450	Driving type	4*2, left hand drive
Gross weight (kg)	3510Kg	Curb Weight (kg)	2990
Wheel base (mm)	3570 mm	Axle number	2
Approaching/Departure Angle(°)	19/18(°)	F/R Axle load(kg)	1670/1840
Passengers in cab	3-8	Maximum speed(km/h)	120
Number of Tyres	6 (1 spare piece)	Tyre type	225/70R 15C(8PR),225/70R15LT
Front/Rear suspension(mm)	1240/1540	Front/Rear track base (mm)	1506/1466
Transmission	6 speed forward with 1 reverse, manual	Fuel type	Diesel oil
Engine parameters			
Brand	JMC	Model	JX493ZLQ4
Displacement (L)	2.771 L	Emission Standard	EURO 4
Power (kw/hp)	80/109	Maximum torque	260N/m
Number of cylinders	4	Cylinder spread pattern	In-line
Intake type	Supercharged and mid-cooling	Rated rotation(rpm)	3800





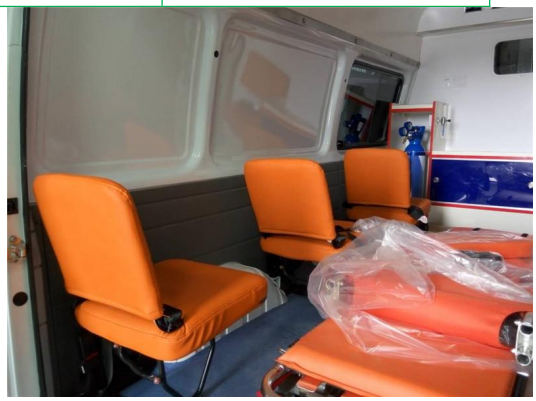

湖北东润泽专用车辆设备有限公司
Hubei Dong Runze Special Vehicle Equipment Co., Ltd.
Specialize Custom Commercial Vehicle Body Building - Semi trailer, Full Trailer - Spare Parts
Tell:008615271357635 Email:sales@tictrucks.com Web:www.truckinchina.com Wuhan City Hubei Provin





Ambulance Van JX6490TA-M4

Diesel Engine model **DURATORQ4D24A4L** 2.4 L 85kW 115 hp
Engine manufacturer JMC wheel base 2933mm

Gross weight(Kg)	3300,3550	Overall dimension(mm)	4963,4863*2000*2600
Curb weight(Kg)	2620,2470	Front/rear hang(mm)	933/1097
Cab seats(person)	3-8	Wheelbase(mm)	2933
Approach/departure angle	22/25	Max speed (Km/h)	130
Axle No.	2	Tire specification	205/75R16C
Axle load (Kg) 1465/1835			
Chassis model	JX6490TA-M4	Manufacturer	JMC
Brand name	JMC	Tires No.	6
Steel spring number	-/2+1	Emission standard	Euro3/Euro4
Engine model	**manufacturer**	**Displacement (ml)**	**power(kw)**
DURATORQ4D24A4L	Jiangling motors co., LTD	2402	85

湖北东润泽专用车辆设备有限公司
Hubei Dong Runze Special Vehicle Equipment Co., Ltd.
Specialize Custom Commercial Vehicle Body Building - Semi trailer, Full Trailer - Spare Parts
Tell:008615271357635 Email:sales@tictrucks.com Web:www.truckinchina.com Wuhan City Hubei Provin

Ford V348 Ambulance Van JX6581T-H4

Diesel Engine model DURATORQ4D244L 2.4 L 103kW 141hp
Engine manufacturer JMC wheel base 3750mm
Performance
Fuel diesel fuel
Environmental standard National IV / Euro 4
Maximum speed 145 km/h 91 mph
ABS optional
Capacity
Passenger capacity (including driver) 10-15
Weights and Ground pressure
Curb weight 2430 kg 2.4 t,
Gross vehicle weight rating 3600 kg 3.6 t 7,900 lbs
Axle load distribution 1670 kg / 1930 kg 1.7 t / 1.9 t
3,682 lbs / 4,255 lbs
Dimensions
Overall length 5780 mm 19′ 0″
Overall width 2000 mm 6′ 7″
Overall height 2590 mm 8′ 6″
Undercarriage and Suspension
Number of axles 2
Wheelbase 3750 mm 12′ 4″
Front track 1740 mm 5′ 9″
Rear track 1704 mm 5′ 8″
Front overhang 933 mm 3′ 1″
Rear overhang 1097 mm 3′ 8″
Angle of approach 22°
Angle of departure 24°
Leaf springs - / 2
Tyres and Wheels
Number of tyres 4
Tyres dimension 215/75R16C, 215/75R16LT
Miscellaneous
Steering control steering wheel







湖北东润泽专用车辆设备有限公司
Hubei Dong Runze Special Vehicle Equipment Co., Ltd.
Specialize Custom Commercial Vehicle Body Building - Semi trailer, Full Trailer - Spare Parts
Tell:008615271357635 Email:sales@tictrucks.com Web:www.truckinchina.com Wuhan City Hubei Provin

Jinbei ambulance Van Transportation basic

Loading capacity	500-1500kg	GVW	1950kg
Dimention	5020*1690*2115(mm)	Application	hospital rescue
Engine	4G20B	Certification	CCC
Power	102hp	Warranty	1 years
Exhaust	1998ml	Equipment	stretcher, oxygen cylinder
Combustion type	Gasoline	MOQ	1 Piece
Number of Axle	2	Electric system	24V
Cabin	Single Cabin	Wheel base	2590mm

Jinbei ambulance Van Guardianship type

Loading capacity	500-1500kg	GVW	1950kg
Dimention	5020*1690*2115(mm)	Application	hospital rescue
Engine	4G20D4B	Certification	CCC
Power	122hp	Warranty	1 years
Exhaust	1977ml	Equipment	stretcher, oxygen cylinder
Combustion type	Gasoline	MOQ	1 Piece
Number of Axle	2	Electric system	24V
Cabin	Single Cabin	Wheel base	2920mm





Ambulance transport type basic configuration list:	
1.Portable folding stretcher 1 piece;	2. Medicine cabinet 1 piece;
3. Fixed oxygen bottle 1 piece;	4. Ttransfusion hook 2 pieces;

湖北东润泽专用车辆设备有限公司
Hubei Dong Runze Special Vehicle Equipment Co., Ltd.
Specialize Custom Commercial Vehicle Body Building - Semi trailer, Full Trailer - Spare Parts
Tell:008615271357635 Email:sales@tictrucks.com Web:www.truckinchina.com Wuhan City Hubei Provin

5. Disinfection lamp 1 piece;	6. Waste bucket 1 piece;
7. Single seat 3 pieces;	8. Long storage cabinet and seat
9.Partition with aluminum alloy windows	10.Blue alarm lamp 1 set;
11. Lights 2 pieces.	12. The inverter 1 piece;
13. Socket 1 set;	14. Portal handrails on the bus;
15.The back door pedal;	16. Medical wear-resistant plastic floor leather;
17. Ambulance cross signs;	
Ambulance monitor Guardianship configuration list:	
1. Polymer materials for medical environmental	2. The long row of ambulance lights and protection
3. Automatic stretcher;	4. Shovel type stretcher; folding stretcher;
5. Oxygen supply system: oxygen bottles, oxygen	6. Seat, accompanying chair;
7. Sterilization lamp;	8. Inverter and battery;
9.The external power supply system;	10. Interior lighting system;
11. Electronic Ventilating Fan;	12.Partition (with observation window);
13.The entry pedal;	14.Front and rear intercom system;
15.Medical washed and wear-resistant flooring;	16.Waste bucket;
17. Body advertising and ambulance logo.	





湖北东润泽专用车辆设备有限公司

Hubei Dong Runze Special Vehicle Equipment Co., Ltd.

Specialize Custom Commercial Vehicle Body Building - Semi trailer, Full Trailer - Spare Parts

Tell:008615271357635 Email:sales@tictrucks.com Web:www.truckinchina.com Wuhan City Hubei Provin







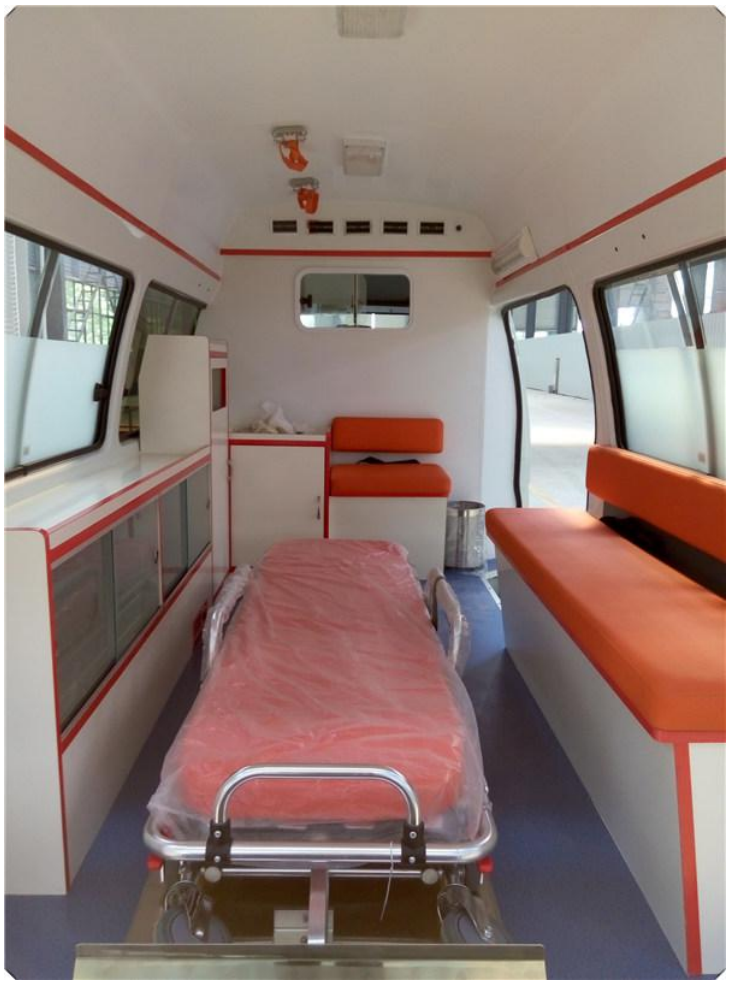



湖北东润泽专用车辆设备有限公司

Hubei Dong Runze Special Vehicle Equipment Co., Ltd.

Specialize Custom Commercial Vehicle Body Building - Semi trailer, Full Trailer - Spare Parts

Tell:008615271357635 Email:sales@tictrucks.com Web:www.truckinchina.com Wuhan City Hubei Provin

Dongfeng ambulance Van



General Description			
Overall Dimension(mm)	5000/5750*2036*2375/2740mm	Driving type	4*2, left hand drive
Gross weight (kg)	3650Kg	Curb Weight (kg)	2550
Wheel base (mm)	3310/3610mm	Axle number	2
Approaching/Departure Angle(°)	20/16(°)	F/R Axle load(kg)	1550/2100
Passengers in cab	3-9	Maximum speed(km/h)	148
Number of Tyres	4	Tyre type	215/75 R16C
Front/Rear suspension(mm)	915/1225	Front/Rear track base (mm)	1734/1728
Transmission	6 speed forward with 1 reverse, manual	Fuel type	Diesel oil
Engine parameters			
Brand	Dongfeng	Model	ZD30D15-4N
Displacement (L)	2.953 L	Emission Standard	EURO 4
Power (kw/hp)	110/150	Maximum torque	295N/m
umber of cylinders	4	Cylinder spread pattern	In-line
Intake type	Supercharged and mid-cooling	Rated rotation(rpm)	3100







湖北东润泽专用车辆设备有限公司
Hubei Dong Runze Special Vehicle Equipment Co., Ltd.
Specialize Custom Commercial Vehicle Body Building - Semi trailer, Full Trailer - Spare Parts
Tell:008615271357635 Email:sales@tictrucks.com Web:www.truckinchina.com Wuhan City Hubei Provin

IVECO Ambulance Van

Performance





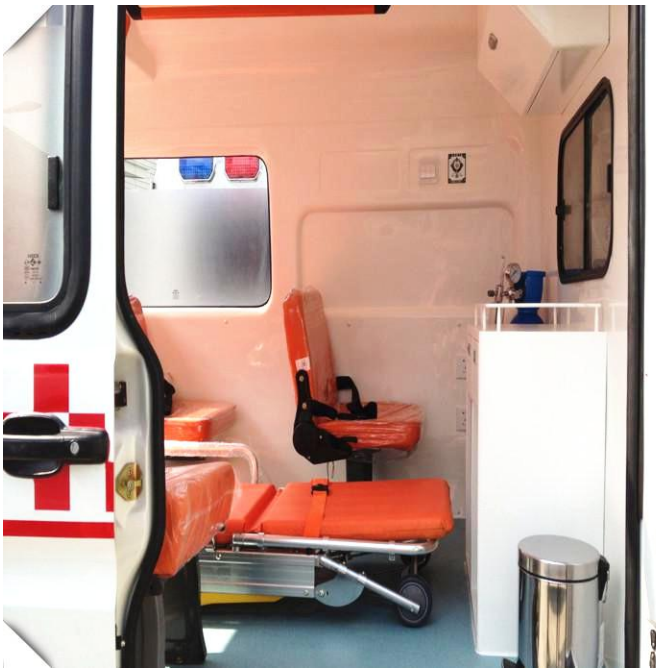

Weights and Ground pressure
Curb weight 2280 kg, 2420 kg
2.3 t, 2.4 t 5,027 lbs,5,335 lbs
Gross vehicle weight 3550 kg 3.6 t
Axle load distribution 1400 kg / 2150 kg
1.4 t / 2.2 t 3,100 lbs / 4,740 lbs
Dimensions
Overall length 4850 mm 15′ 11″
Overall width 2000 mm 6′ 7″
Overall height 2720 mm / 2450 mm 9′
Undercarriage and Suspension
Front overhang960 mm 3′ 2″
Rear overhang 1090 mm 3′ 7″
Angle of approach 21°
Angle of departure14.5°

NJ6484ACM/ NJ6484CCM
Engine model SOFIM8140.47Z4
Maximum speed 130 km/h



湖北东润泽专用车辆设备有限公司
Hubei Dong Runze Special Vehicle Equipment Co., Ltd.
Specialize Custom Commercial Vehicle Body Building - Semi trailer, Full Trailer - Spare Parts
Tell:008615271357635 Email:sales@tictrucks.com Web:www.truckinchina.com Wuhan City Hubei Provin

NJ6484ACM /NJ6484CCMN IVECO AMBULANCE



Overall size:	4850*2000*2450，2720；4845，4905*2000*2280，2620
Overall G.W.:	3550kg
Number of passengers:	3-6 passengers
Wheel base:	2800mm
Maximum speed:	130km/h
Axis number:	2 pieces
Tyre:	215/75R14C,215/65R16LT
Engin:	SOFIM8140.47Z4
Horse power:	122HP
Displacement:	2499CC
Emmision standard:	Euro 4
Fuel type:	Diesel
Transmission:	Manual,MT Six speed levers,5 speed forward with 1 reverse

2，

IVECO AMBULANCE

湖北东润泽专用车辆设备有限公司
Hubei Dong Runze Special Vehicle Equipment Co., Ltd.
Specialize Custom Commercial Vehicle Body Building - Semi trailer, Full Trailer - Spare Parts
Tell:008615271357635 Email:sales@tictrucks.com Web:www.truckinchina.com Wuhan City Hubei Provin

(Diesel engine, High roof)	
Technical parameters	
wheelbase (mm):2800	
Overall dimensions (mm):4905×2000×2500	
Complete vehicle curb mass:(kg):2370	
GVW (kg):3550	
Engine:SOFIM8140.47Z4	
Fuel type: diesel	
Fuel consumption:9L	
Working manner: in-line, 4 cylinders, water-cooled, direct Injection turbocharged inter-cooled diesel engine	Standard configuration of vehicle
Displacement (L):2.499	Manual side mirror
Emission standard:GB17691-2005 Euro IV, GB3847-2005	Power window
Maximum power (kw):90	radio (with CD)
Clutch: single plate, dry type, diaphragm spring, pull type clutch, mechanical inhaul cable	Hand-free Intercom system between driver's cab and Patient's compartment
Transmission: mechanical type, forward gear with synchronizer	2 seats in driver's cab
Front overhang/ Rear overhang: 1000/1045(mm)	Double open rear door
Front wheel tread/ Rear wheel tread: 1728/1697	Foot pedal in rear door
Brake system: front disc and rear drum	Air conditioner and lighting system
Max. speed (Km/h):130	Vehicle-mounted air conditioner in driver's cab
Steering system: power-assisted steering	Vehicle-mounted air conditioner in Patient's compartment
Tire:215/75R14C	Ventilation fan mounted on the roof of Patient's compartment
Emergency alarm system	1 illumination light s left and right side of vehicle outside
Control plate of siren and alarm lamp mounted in driver's cab	Illumination lights in Patient's compartment
Control plate of siren and alarm lamp mounted in driver's cab	Spotlight lights in the roof of Patient's compartment
100W loud speaker	Ultraviolet radiation disinfector light
Blue Flashing alarm light bar mounted on the front roof of vehicle	Central power supply distribution system
2 Blue Flashing alarm lights mounted on left and right side of vehicle	Automatic charging system
Round cylinder alarm lights on the rear roof of vehicle	10m mobile cable
Standard configuration of IVECO Ambulance	12V outlets in Patient's compartment
1) IVECO NJ6484CCM Chassis: 1unit	220V outlets in Patient's compartment
2) Anti-skidding floor in Patient's compartment: 1set	230V/16A waterproof outside outlet with protection cover

3) Integrated interior decoration: 1set	12V DC power-supply system
4) Partition wall: 1 set	Intelligent inverted power supply system(12V -220V)
5) Illuminating Light in Patient's compartment: 1set	Central control system
6) Fixed transfusion bracket: 1set	Patient's compartment
7) Medicine and instrument cabinet in Patient's compartment: 1set	Compartment wall mounted between driver's cab and Patient's compartment , a glass window in wall to make observation
8) Long bench:1set	One foldable doctor’s seat mounted to floor near to compartment wall
9) Supply system of oxygen: 1set	Long bench one piece, mounted in right side of patient's compartment
10) Inverted power supply: 1set	Oxygen bottle (10L×2) ,mounted in left side of vehicle
11) External power supply: 1set	Oxygen reducing valve
12) Ultraviolet radiation disinfector light:1pc	Instruments cabinet mounted to the upper of wheel casing in the left side of patient's compartment
13) Outside identifying light: 1set	Wall, door, and vehicle roof adopts aluminum-plastic Composite materials
14) Flash alarm light bar: 1set	Imported Interior medical floor, acid & alkali resistance, fire prevention, anti-skid, anti-static.
15) Ventilation system: 1set	Raised edge of patient's compartment, dust-proof, anti-skidding, washable
16) Doctor chair: 1set	Ventilation fan mounted in the interior roof of Patient's compartment
17) Self-lifting stretcher (Primary Stretcher): 1set	Illuminating lights mounted to the interior roof of patient's compartment
18) Adjustable scoop stretcher (Secondary Stretcher): 1set	Multipurpose medicine cabinet mounted to the middle between driver’s cab and Patient's compartment
19) Multifunctional operation panel: 1set	Cabinet for emergency goods mounted to patient's compartment
20) Fire Extinguisher: 2pcs	Adjustable instruments support mounted to left front side of patient's compartment
21) Crashworthy head restraint: 1set	Strong blue or red reflective strip in waist of body
22) Garbage bin: 1pc	Mobile Self-lifting stretcher mounted to patient's compartment
23) Non-contact Interphone system: 1set	Adjustable shovel Stretcher mounted to the interior left side of rear door.
24) Special cabinet for stupefacient: 1set	220V outside power supply

NJ6556DAS **IVECO** Ambulance

Engine model	Engine displacement	Engine power	Engine manufacturer
F1CE0481P	2998 cc 3.0 L	107 kW 146 hp	Nanjing Iveco Automobile Co., Ltd.

Performance Maximum speed 140 km/h ABS optional

Capacity Passenger capacity (including driver) 5-9

Weights and Ground pressure Curb weight 2590 kg 2.6 t 5,710 lbs

湖北东润泽专用车辆设备有限公司
Hubei Dong Runze Special Vehicle Equipment Co., Ltd.
Specialize Custom Commercial Vehicle Body Building - Semi trailer, Full Trailer - Spare Parts
Tell:008615271357635 Email:sales@tictrucks.com Web:www.truckinchina.com Wuhan City Hubei Provin

Gross vehicle 3550 kg 3.6 t 7,826 lbs

Axle load distribution 1530 kg / 2020 kg 1.5 t / 2 t 3,373 lbs / 4,453 lbs

Dimensions

Overall length 5490 mm 18′ 1″

Overall width 2000 mm 6′ 7″

Overall height 2190 mm / 2540 mm / 2790 m

Undercarriage and Suspension

Number of axles 2

Wheelbase 3310 mm 10′ 11″

Front track 1695 mm 5′ 7″

Rear track 1540 mm 5′ 1″

Front overhang 1000 mm 3′ 4″

Rear overhang 1180 mm 3′ 11″

Angle of approach 20°

Angle of departure 15°

Leaf springs - / 4+2, - / 3, - / -

Tyres and Wheels

Number of tyres 6

Tyres dimension 6.50R16C, 6.50R16LT





NJ6604CC **IVECO mining** Ambulance

Overall dimensions	5990×2000×3115mm	Curb Weight	3795kg
Wheelbase	3310mm	Number of Tyres	4
Max speed	135km/h	Tyre	6.50R16C
Chassis			
Model	A42(NJ6604CC)	Brand	IVECO

Engine (Motor) (Diesel)			
Brands	Model	Displacement	Rated Power
Iveco	SOFIM8140.43E4	2798	100Kw
Iveco	FICE0481P	2998	107Kw

NJ6714CC IVECO mining Ambulance

Overall dimensions	7193,7253*2000*3125,3180	Curb Weight	3795kg
Wheelbase	4180mm	Number of Tyres	4
Max speed	130km/h	Tyre	6.50R16C
Chassis			
Model	A42(NJ6604CC)	Brand	IVECO
Engine (Motor) (Diesel)			
Brands	Model	Displacement	Rated Power
Iveco	SOFIM8140.43E4	2798	100Kw
Iveco	FICE0481P	2998	107Kw









湖北东润泽专用车辆设备有限公司
Hubei Dong Runze Special Vehicle Equipment Co., Ltd.
Specialize Custom Commercial Vehicle Body Building - Semi trailer, Full Trailer - Spare Parts
Tell:008615271357635 Email:sales@tictrucks.com Web:www.truckinchina.com Wuhan City Hubei Provin

【Interior layout of ambulance】

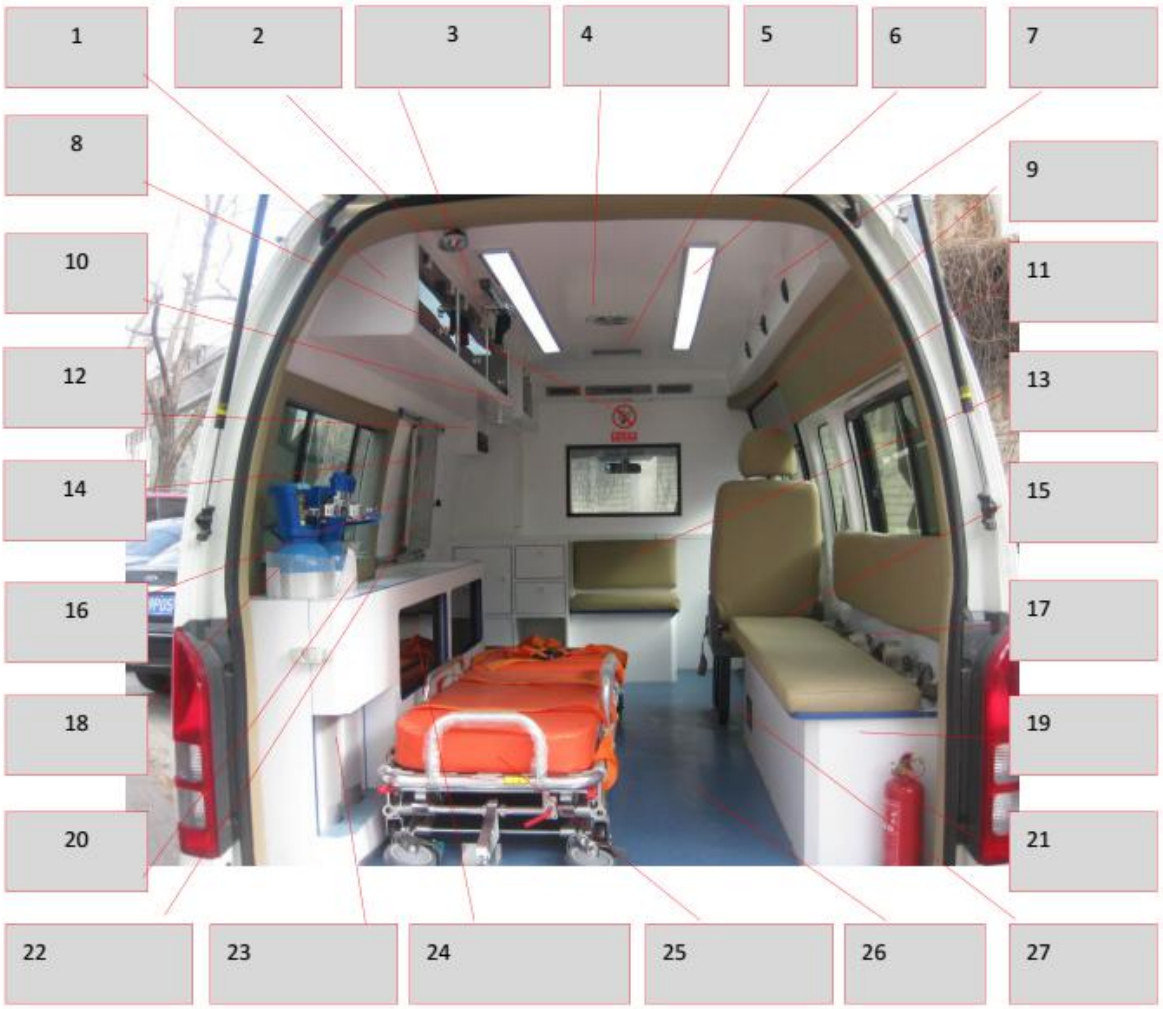

1. Wall cupboard
2. Room Lamp
3. Sliding infusion equipment
4. Interior roof ventilator
5. Sterilizing lamp
6. Illumination lamp
7. Air conditioning inlet
8. Warning mark
9. Side sliding door
10. Intercom system
11. Attendant seat
12. Operation panel
13. Doctor seat
14. Oxygen uptake device
15. Long bench
16. Power socket
17. Safety belt
18. Oxygen cylinders
19. Storage box
20. Device table
21. Fire extinguisher
22. Device fixing plate
23. Oxygen bottle cabinet
24. Emergency devices cabinet
25. Auto lift stretcher
26. Medical floor
27. Warm braw outlet

湖北东润泽专用车辆设备有限公司

Hubei Dong Runze Special Vehicle Equipment Co., Ltd.

Specialize Custom Commercial Vehicle Body Building - Semi trailer, Full Trailer - Spare Parts

Tell:008615271357635 Email:sales@tictrucks.com Web:www.truckinchina.com Wuhan City Hubei Provin



BJ6546MD2BA-XA Ambulance van Transportation basic

Chassis:		BJ6546MD2BA-XA	Fuel type:	diesel fuel
Engine:		4J25TC	Seating capacity:	2-6
Displacement (cc):		2499	Wheelbase (mm):	2890
Power (kW):		65	Dimensions (mm):	5320 x 1690 x 2250/2425

Performance Fuel diesel fuel

Environmental standard National IV / Euro 4

Maximum speed 120 km/h

ABS optional Capacity Passenger capacity (including driver) 2-6

Weights and Ground pressure

Curb weight 1780 kg 1.8 t 3,924 lbs

Gross vehicle weight rating 2580 kg 2.6 t 5,688 lbs

Axle load distribution 1161 kg / 1419 kg 1.2 t / 1.4 t

Dimensions

Overall length 5320 mm 17′ 6″

Overall width 1690 mm 5′ 7″

Overall height 2250 mm / 2425 mm 7′ 5″ / 8′ 0″

Number of axles 2

Wheelbase 2890 mm 9′ 6″

Front track 1460 mm 4′ 10″

Rear track 1440 mm 4′ 9″

Front overhang 1320 mm 4′ 4″

Rear overhang 1110 mm 3′ 8″

Angle of approach 19°

Angle of departure 20°

Leaf springs - / 4+1

Tyres and Wheels

Number of tyres 4

Tyres dimension 185R14C, 195/70R15

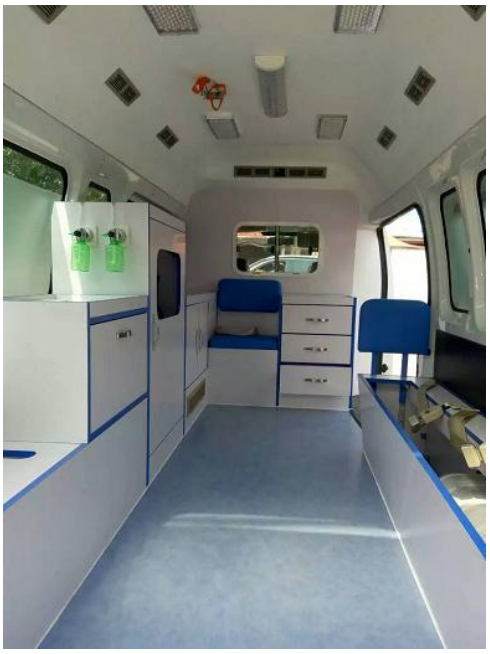

湖北东润泽专用车辆设备有限公司

Hubei Dong Runze Special Vehicle Equipment Co., Ltd.

Specialize Custom Commercial Vehicle Body Building - Semi trailer, Full Trailer - Spare Parts

Tell:008615271357635 Email:sales@tictrucks.com Web:www.truckinchina.com Wuhan City Hubei Provin

BJ6536B1DVA-X Ambulance van Transportation basic

Chassis:	BJ6536B1DVA-X	Fuel type:	gasoline
Engine:	BJ486EQV4	Seating capacity:	2-9
Displacement (cc):	1998	Wheelbase (mm):	2890
Power (kW):	95	Dimensions (mm):	5320 × 1690 × 2250/2425







Fuel gasoline

Environmental standard National IV / Euro 4

Maximum speed 135 km/h 84 mph

Capacity Passenger capacity (including driver) 2-9

Weights and Ground pressure

Curb weight 1750 kg 1.8 t 3,858 lbs

Gross vehicle weight rating 2850 kg 2.9 t 6,283 lbs

Axle load distribution 1350 kg / 1500 kg 1.4 t / 1.5 t

Dimensions

Overall length 5320 mm 17′ 6″

Overall width 1690 mm 5′ 7″

Overall height 2250 mm / 2425 mm 7′ 5″ / 8′ 0″

Undercarriage and Suspension

Number of axles 2

Wheelbase 2890 mm 9′ 6″

Front track 1460 mm 4′ 10″

Rear track 1440 mm 4′ 9″

Front overhang 1320 mm 4′ 4″

Rear overhang 1110 mm 3′ 8″

Angle of approach 19°

Angle of departure 20°

Leaf springs - / 4+1

Tyres and Wheels

Number of tyres 4

Tyres dimension 185R14C, 195/70R15

湖北东润泽专用车辆设备有限公司
Hubei Dong Runze Special Vehicle Equipment Co., Ltd.
Specialize Custom Commercial Vehicle Body Building - Semi trailer, Full Trailer - Spare Parts
Tell:008615271357635 Email:sales@tictrucks.com Web:www.truckinchina.com Wuhan City Hubei Provin

BJ6539B1PVA-AC Ambulance van Transportation basic

Chassis:	BJ6539B1PVA-AC	Fuel type:	gasoline
Engine:	BJ486EQV4	Seating capacity:	2-9
Displacement (cc):	1998	Wheelbase (mm):	3050
Power (kW):	95	Dimensions (mm):	5320×1695×2500





BJ6526B1DXA-X1 Foton ambulance

Chassis:	BJ6526B1DXA-X1	Fuel type:	gasoline
Engine:	4G64S4N	Seating capacity:	2-7
Displacement (cc):	2351	Wheelbase (mm):	3430
Power (kW):	89.5	Dimensions (mm):	5235 × 1825 × 2150/2190

Fuel gasoline
Environmental standard National IV / Euro 4
Maximum speed 135 km/h 84 mph
Capacity
Passenger capacity (including driver) 2-7
Weights and Ground pressure
Curb weight 2010 kg 2 t 4,431 lbs
Gross vehicle weight rating 2865 kg 2.9 t
Axle load distribution 1285 kg / 1580 kg 1.3 t / 1.6 t
Dimensions
Overall length 5235 mm 17′ 3″
Overall width 1825 mm 6′ 0″
Overall height 2150 mm / 2190 mm 7′ 1″ / 7′ 3″
Undercarriage and Suspension
Number of axles 2

Wheelbase 3430 mm 11′ 4″
Front track 1560 mm 5′ 2″
Rear track 1540 mm 5′ 1″
Front overhang 845 mm 2′ 10″
Rear overhang 960 mm 3′ 2″
Approach / departure angle 22 / 16, 23 / 17
Leaf springs - / -, - / 4+1
Tyres and Wheels
Number of tyres 4
Tyres dimension 195/70R15C, 205/70R15

湖北东润泽专用车辆设备有限公司
Hubei Dong Runze Special Vehicle Equipment Co., Ltd.
Specialize Custom Commercial Vehicle Body Building - Semi trailer, Full Trailer - Spare Parts
Tell:008615271357635 Email:sales@tictrucks.com Web:www.truckinchina.com Wuhan City Hubei Provin

BJ6508BDDDA-BA FOTON Ambulance van



Chassis:	BJ6508BDDDA-BA	Fuel type:	Diesel
Engine:	ISF2.8s4129P	Seating capacity:	5-7
Displacement (cc):	2780	Wheelbase (mm):	2933
Power (kW):	96	Dimensions (mm):	5015×2000×2670

BJ6608B1DDA-AB FOTON Ambulance van



湖北东润泽专用车辆设备有限公司
Hubei Dong Runze Special Vehicle Equipment Co., Ltd.
Specialize Custom Commercial Vehicle Body Building - Semi trailer, Full Trailer - Spare Parts
Tell:008615271357635 Email:sales@tictrucks.com Web:www.truckinchina.com Wuhan City Hubei Provin

A	**Technical parameters**	
	wheelbase (mm):3750	
	Overall dimensions (mm):5990×2000×2415 (2665,including warning light height)	
	Patient compartment size (mm): 2450X1740X1665	
	Complete vehicle curb mass:(kg):2500	
	GVW (kg):3499	
	Engine:ISF2.8s4161P Cummins engine, only need one maintenance per 20000km	
	Vehicle body: frameless body with high strength steel sheet	
	Fuel type: diesel	
	Fuel consumption:9.5L	
	Safety system: ABS, Airbag for driver, parking sensor	
	GPS, parking camera, DVD	Optional
	Working manner: in-line, 4 cylinders, water-cooled, direct Injection inter-cooled diesel engine	
	Displacement (ml):2780	
	Emission standard: IV	
	Maximum power (kw/rpm):120/3600	
	Clutch: Germany Schaeffler clutch	
	Transmission: Germany GETRAG transmission system, 6 speed, Manual	
	Front overhang/ Rear overhang: 993/1247(mm)	
	Front wheel tread/ Rear wheel tread: 1740/1704	
	Brake system: 4 wheels disc brake	
	Max. speed (Km/h):143	
	Steering system: power-assisted steering	
	Tire:215/75R16LT	
B	**Standard configuration of vehicle**	
1	Electric side mirrors	
2	Power window	
3	radio (with CD)	
4	Hand-free Intercom system between driver's cab and Patient's compartment	
5	2 seats in driver's cab	
6	Single upward opening rear door	
7	Foot pedal in rear door	
C	**Air conditioner and lighting system**	

1	Vehicle-mounted air conditioner in driver's cab	1
2	Vehicle-mounted air conditioner in Patient's compartment	1
3	Ventilation fan mounted on the roof of Patient's compartment	1
4	1 illumination light s left and right side of vehicle outside	2
7	Illumination lights in Patient's compartment	6
8	Spotlight lights in the roof of Patient's compartment	1
9	Ultraviolet radiation disinfector light	1
D	**Central power supply distribution system**	
1	Automatic charging system	1
2	10m mobile cable	1
3	12V outlets in Patient's compartment	3
4	220V outlets in Patient's compartment	3
5	230V/16A waterproof outside outlet with protection cover	1
6	12V DC power-supply system	1
7	Intelligent inverted power supply system(12V -220V)	1
8	Central control system	1
E	**Emergency alarm system**	
1	Control plate of siren and alarm lamp mounted in driver's cab	1
2	100W loud speaker	1
3	Blue Flashing alarm light bar mounted on the front roof of vehicle	1
4	2 Blue Flashing alarm lights mounted on left and right side of vehicle	4
5	Round cylinder alarm lights on the rear roof of vehicle	2
F	**Patient's compartment**	
1	Compartment wall mounted between driver's cab and Patient's compartment , a glass windo w in wall to make observation	
2	One foldable doctor's seat mounted to floor near to compartment wall	1
3	Long bench one piece, mounted in right side of patient's compartment	1
4	Oxygen bottle (10L×2) ,mounted in left side of vehicle	
5	Oxygen reducing valve	1
6	Instruments and medicine cabinet mounted to the the left side of patient's compartment	
7	Wall, door, and vehicle roof adopts aluminum-plastic Composite materials	
8	Imported Interior medical floor, acid & alkali resistance, fire prevention, anti-skid, anti-static.	
9	Raised edge of patient's compartment, dust-proof, anti-skidding, washable	
10	Ventilation fan mounted in the interior roof of Patient's compartment	1

11	Illuminating lights mounted to the interior roof of patient's compartment	6
12	Red color reflective strip in waist of body	
13	Mobile Self-lifting stretcher mounted to patient's compartment	1
14	Adjustable shovel Stretcher mounted to the interior left side of rear door.	
15	220V outside power supply	1

FOTON BJ6608B1DDA-AB Chassis



2) Anti-skidding floor in Patient's compartment: 1set
3) Integrated interior decoration: 1set
4) Partition wall: 1 set
5) Illuminating Light in Patient's compartment (light color can be changed): 1set
6) Transfusion bracket: 1set
7) Medicine and instrument cabinet in Patient's compartment: 1set
8) Long bench:1set
9) Supply system of oxygen: 1set
10) Inverted power supply: 1set
11) External power supply: 1set
12) Ultraviolet radiation disinfector light:1pc
13) Outside identifying light: 1set
14) Flash alarm light bar: 1set
15) Ventilation system: 1set
16) Doctor chair: 1set
17) Self-lifting stretcher (Primary Stretcher): 1set
18) Adjustable scoop stretcher (Secondary Stretcher): 1set
19) Multifunctional operation panel: 1set
20) Fire Extinguisher: 2pcs
21) Crashworthy head restraint: 1set
22) Garbage bin: 1pc
23) Non-contact Interphone system: 1set
24) Special cabinet for stupefacient: 1set

Optional equipments:

1) Spine board
2) Head immobilizer
3) Cervical collar
4) Patient monitor
5) Defibrillator monitor
6) Suction unit
7) Respirator / First-aid kit

